

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 125 571 A2**

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
**22.08.2001 Bulletin 2001/34**

(51) Int Cl.7: **A61F 13/496**

(21) Application number: **01301411.3**

(22) Date of filing: **19.02.2001**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventors:  
• **Matsushita, Michiyo, c/o Technical Center  
Mitoyo-gun, Kagawa-ken 769-1602 (JP)**  
• **Hanajiri, Takeshi, c/o Technical Center  
Kagawa-ken 769-1602 (JP)**

(30) Priority: **18.02.2000 JP 2000046767**

(74) Representative: **Parry, Christopher Stephen  
Saunders & Dolleymore,  
9 Rickmansworth Road  
Watford, Herts. WD18 0JU (GB)**


(71) Applicant: **UNI-CHARM CORPORATION  
Kawanoe-shi Ehime-ken (JP)**

(54) **Trunks-type disposable pants**

(57) Disclosed trunks-type disposable pants 1 includes a pair of inner sheets 2A, 2B and a pair of outer sheets 3A, 3B, the inner sheets 2A, 2B have cutouts depressed from the upper ends 2a toward the lower ends 2b their front and rear side portions with cutouts depressed from the upper ends toward the lower ends and liquid-absorbent panels attached to opposed surfaces

of the inner sheets 2A, 2B in the vicinity of the respective cutouts so that the opposed surfaces of the inner sheets 2A, 2B may be bonded together by means of bond lines extending in parallel to the cutouts and partially extending below the liquid-absorbent panels and opposed surfaces of the inner sheets 2A, 2B and the outer sheets 3A, 3B are bonded together along the front and rear side portions of these sheets 2A, 2B, 3A, 3B.

**FIG.3**

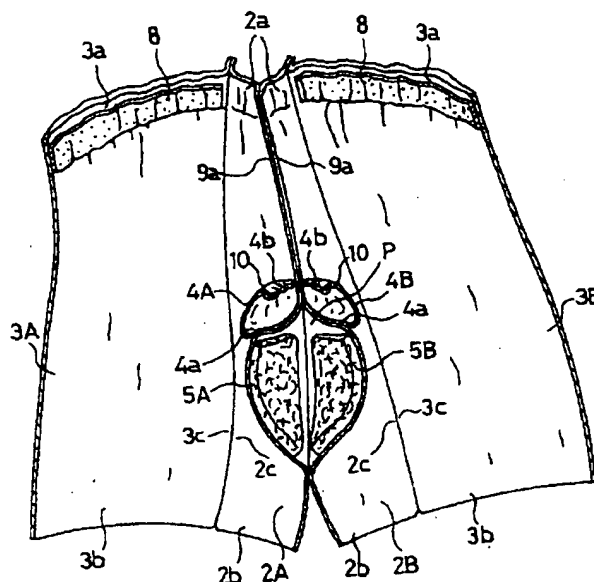

**EP 1 125 571 A2**

## Description

[0001] This invention relates to trunks-type disposable pants.

[0002] Japanese Patent Application Publication No. 1994-63072A describes trunks-type disposable pants made by a process comprising steps of placing separately formed with front and rear bodies, bonding these front and rear bodies along bond lines extending on crotch regions of these bodies so as to describe curves being convex upward and attaching a longitudinally larger liquid-absorbent panel to the inner surface of the crotch region. Excretion is absorbed by the liquid-absorbent panel attached to the crotch region.

[0003] In the pants disclosed in the Gazette, the longitudinally larger liquid-absorbent panel has a desired width dimension and attached to the crotch region so as to extend in horizontal direction. Transversely opposite side edges of the panel are compressed between thighs of a wearer and these side edges may give the wearer a feeling of incompatibility as the pants are put on the wearer's body. In addition, these side edges have not barriers to prevent excretion spread over the upper surface of the panel from leaking through gap defined between both sides of the crotch region and the wearer's thighs.

[0004] In view of the problem as has been described above, it is an object of this invention to provide trunks-type disposable pants improved so that excretion leak possibly occurring from both sides of a crotch region is reliably avoided without giving a wearer a feeling of incompatibility.

[0005] According to this invention, there is provided trunks-type disposable pants having a waist-opening at its top and a pair of leg-openings at its bottom wherein the waist-opening is provided along its peripheral edge having an elastic stretchability circumferentially of the waist-opening.

[0006] The trunks-type disposable pants further comprises a pair of inner sheets confronting each other and a pair of outer sheets lying outside respective the inner sheets, the inner sheets as well as the outer sheets being contoured by upper and lower ends transversely extending in parallel to each other, respectively, and front and rear side portions longitudinally extending in parallel to each other, respectively, the inner sheets are formed between their front and rear side portions with cutouts depressed from the upper ends toward the lower ends and provided with mat-like liquid-absorbent panels attached to opposed surfaces of the inner sheets so that the opposed surfaces of the inner sheets are bonded together by means of bond lines extending in parallel to the cutouts and partially extending below the liquid-absorbent panels, and opposed surfaces of the inner sheets and the outer sheets are bonded together along the front and rear side portions of these sheets.

[0007] The trunks-type disposable pants according to this invention has a simplified construction such that the

inner sheets are placed upon each other and the opposed surfaces of these inner sheets are bonded together while the respective inner sheets are placed upon the respectively adjacent outer sheets and the opposed surfaces of respective pairs of the adjacent inner and outer sheets are bonded together. Such simplified construction facilitates the pants to be made and is suitable for disposable sanitary article.

[0008] With the novel pants having the side sheets bonded to the inner sheets in the vicinity of their bottom sides, the side sheets and the regions in the opposed surfaces of the inner sheets extending from the bottom sides to the bond lines are expanded outward transversely of the pants as the elastic members attached to the respective side sheets contract. Consequently, these sheets form the pocket opening upwardly of the pants. The pocket includes therein the liquid-absorbent panels. The side sheets and the inner sheets define the barriers so that the amount of excretion discharged into the pocket is absorbed by the panels and the barriers prevent any leak of the excretion from possibly occurring in the vicinity of the crotch region.

[0009] In the pants having the elastic members bonded to the respective inner sheets in the vicinity of the bottom sides thereof, the regions in the opposed surfaces of the inner sheets extending from the bottom sides to the bond lines are expanded outward transversely of the pants as the elastic members bonded to the inner sheets contract. Consequently, the inner sheets form the pocket opening upwardly of the pants. The pocket includes therein the liquid-absorbent panels and the respective inner sheets define barriers functioning to prevent any amount of the excretion having been discharged into the pocket and absorbed by the panels from leaking from the crotch region.

[0010] The panels extend in parallel to the inner sheets substantially in vertical direction and therefore are less bulky in the crotch region than when these panels in horizontal direction. In this manner, it is not apprehended that the panels give the wearer a feeling of incompatibility.

[0011] The novel pants achieve a substantially higher bonding strength as measured circumferentially of the pants than that achieved by the pants in which the opposed surfaces are not bonded together along the regions. This is because, according to this invention, the opposed surfaces of the inner sheets are bonded together along regions of the front and rear side portions extending in the vicinity of the respective upper ends of said inner sheets.

Fig. 1 is a perspective view showing one embodiment of a trunks-type disposable pants according to this invention as viewed from the front;

Fig. 2 is an exploded perspective view showing the pants of Fig. 1;

Fig. 3 is a perspective view showing the pants of Fig. 1 as viewed in a section taken along line A - A

in Fig. 1;

Fig. 4 is a sectional view showing the pants of Fig. 1 as taken along line B - B;

Fig. 5 is a perspective view showing the trunks-type disposable pants as one embodiment of this invention different from that of Fig. 1 as viewed from the front;

Fig. 6 is an exploded perspective view showing the pants of Fig. 5;

Fig. 7 is a perspective view showing the pants of Fig. 5 as viewed in a section taken along line C - C in Fig. 5; and

Fig. 8 is a sectional view showing the pants of Fig. 5 as taken along line D - D in Fig. 5.

**[0012]** Details of disposable pants of trunks-type according to this invention will be more fully understood from the description given hereunder with reference to the accompanying drawings.

**[0013]** Fig. 1 is a perspective view showing disposable pants 1 as partially broken away and Fig. 2 is an exploded perspective view showing the pants of Fig. 1. In Fig. 2, a pair of inner sheets 2A, 2B are opposed to each other symmetrically with respect to a plane and a pair of outer sheets 3A, 3B are arranged outside the respective inner sheets 2A, 2B so as to be opposed to each other also with respect to a plane. Liquid-resistant side sheets 4A, 4B are interposed between the inner and the outer sheets 2A, 2B; 3A, 3B, respectively.

**[0014]** In addition to these pair of symmetric inner sheets 2A, 2B, pair of symmetric outer sheets 3A, 3B and pair of liquid-resistant side sheets 4A, 4B, the pants 1 further comprise a pair of mat-like liquid-absorbent panels 5A, 5B.

**[0015]** In the pants 1, the inner sheets 2A, 2B and the outer sheets 3A, 3B define together a waist-opening 6 along a top of the pants 1 and a pair of leg-openings 7 along a bottom of the pants 1. The waist-opening 6 is provided along its peripheral edge with a film-like elastically stretchable member 8 bonded with tension thereto so as to extend circumferentially of the pants 1.

**[0016]** The inner sheets 2A, 2B is contoured by upper and lower ends 2a, 2b extending in parallel to each other transversely of the pants 1 and a front and rear side portions 2c, 2d extending in parallel to each other longitudinally of the pants 1. The inner sheet 2A, 2B is formed between the front and rear side portions 2c, 2d with a cutout 9 depressed from the upper end 2a toward the lower end 2b. This cutout 9 is contoured by opposite sides 9a of the inner sheet 2A, 2B extending longitudinally thereof and a bottom side 9b of the inner sheet 2A, 2B transversely extending between respective lower ends of the opposite sides 9a.

**[0017]** In the vicinity of the bottom sides 9b of the inner sheet 2A, 2B, the side sheet 4A, 4B transversely extends above the panel 5A, 5B. The rear side edge 2d of the inner sheet 2A, 2B gets nearer, describing a circular arc, to a longitudinal center line Y1 bisecting a dimen-

sion between the front side portion 2c and the rear side portion 2d as the rear side edge 2d extends from the upper end 2a toward the lower end 2b.

**[0018]** The panel 5A, 5B is placed in a region surrounded by the front and rear side portions 2c, 2d, the lower end 2b and the bottom side 9b of the inner sheet 2A, 2B and bonded to a surface of the sheet 2A, 2B opposed to the panel 5A, 5B.

**[0019]** The side sheet 4A, 4B is of a rectangular shape which is transversely longer and has a fixed end 4a bonded to the inner sheet 2A, 2B in the vicinity of its bottom side 9b, a free end 4b extending across the cutout 9 above the fixed end 4a, and transversely opposite fixed ends 4c longitudinally extending in parallel to the front and rear side portions 2c, 2d of the inner sheet 2A, 2B and bonded to the inner sheet 2A, 2B in the vicinity of its opposite sides 9a. The free end 4b is provided with a transversely extending elastically stretchable member 10 bonded with tension thereto so that the member 10 is covered with a portion of the free end 4b.

**[0020]** The outer sheet 3A, 3B is contoured by upper and lower ends 3a, 3b transversely extending in parallel to each other and front and rear side edges 3c, 3d longitudinally extending in parallel to each other. The rear side edge 3d of the outer sheet 3A, 3B gets nearer, describing a circular arc, to a longitudinal center line Y2 bisecting a dimension between the front side edge 3c and the rear side edge 3d as the rear side edge 3d extends from the upper end 3a toward the lower end 3b. Surface of the outer sheet 3A, 3B opposed to the inner sheet 2A, 2B is provided along its upper end 3a with a transversely extending elastic member 8 bonded thereto.

**[0021]** To assemble the components illustrated by Fig. 2 in the exploded perspective view and thereby to obtain the pants 1, the inner sheets 2A, 2B are placed upon each other with the respective center lines Y1 brought in line with each other and then the opposed surfaces thereof are continuously or intermittently bonded to each other along bond lines 11. These bond lines 11 extend in parallel to the cutouts 9, describing circular arcs, from the upper ends 2a toward the lower ends 2b of the sheets 2A, 2B, respectively. The portions of the bond lines 11 describing the circular arcs extend between the panels 5A, 5B and the lower ends 2b of the sheets 2A, 2B.

**[0022]** After the opposed surfaces of the inner sheets 2A, 2B have been bonded to each other, the respective fixed ends 4a of the side sheets 4A, 4B are partially folded back to respective inner surfaces of the side sheets 4A, 4B and these fixed ends 4a are bonded to respective outer surfaces of the sheets 2A, 2B in the vicinity of their respective bottom sides 9b. At the same time, the transversely opposite ends 4c also are bonded to the sheets 2A, 2B in the vicinity of their opposed sides 9a with the elastic members 10 being kept under tension.

**[0023]** The inner sheets 2A, 2B and the outer sheets 3A, 3B are placed upon one another, respectively, with

the center lines Y1, Y2 of these inner and outer sheets 2A, 2B; 3A, 3B brought in line with one another, respectively. Thereupon, the upper and lower ends 2a, 3a; 2b, 3b as well as the front and rear side portions 2c, 3c; 2d, 3d of the inner and outer sheets 2A, 2B; 3A, 3B are also brought in lines, respectively, with one another.

**[0024]** The inner and outer sheets 2A, 3A have their surfaces opposed to each other continuously or intermittently bonded to each other by means of bond lines 12 extending along the front and rear side portion 2c, 2d; 3c, 3d, respectively. Similarly, the inner and outer sheets 2B, 3B have their surfaces opposed to each other continuously or intermittently bonded to each other by means of bond lines 12 extending along the front and rear side portions 2c, 2d; 3c, 3d, respectively.

**[0025]** Fig. 3 is a perspective view showing the pants of Fig. 1 as viewed in a section taken along line A - A in Fig. 1 and Fig. 4 is a sectional view showing the pants of Fig. 1 as taken along line B - B. Of the inner sheets 2A, 2B placed upon each other, the respective opposed sides 9a are placed upon each other so as to be oriented inwardly of the pants 1. The inner sheets 2A, 2B and the outer sheets 3A, 3B have their front and rear side portions 2c, 2d; 3c, 3d placed upon one another so as to be oriented outwardly of the pants 1.

**[0026]** In the pants 1 assembled, the respective side sheets 4A, 4B as well as the opposed surfaces of the inner sheets 2A, 2B extending from their bottom sides 9b to the respective bond lines 11 expand outward transversely of the pants 1 as the elastic members 10 bonded with tension to the respective free ends 4b of the side sheets 4A, 4B contract so that these sheets 2A, 2B, 4A, 4B form a pocket P opening upwardly of the pants 1.

**[0027]** In the pants 1 assembled, the respective fixed ends 4a of the side sheets 4A, 4B have been folded back toward the inner surfaces thereof and bonded to the respective outer surfaces of the inner sheets 2A, 2B. The respective free ends 4b of the side sheets 4A, 4B are biased to tilt outward transversely of the pants 1 and thereby to open the pocket P.

**[0028]** The side sheets 4A, 4B and the inner sheets 2A, 2B forming the pocket P serve as barriers of the pocket P. Excretion discharged into the pocket P is absorbed by the panels 5A, 5B lying within the pocket P. The barriers function to prevent excretion leak from occurring in the vicinity of a crotch region. The panels 5A, 5B extend substantially in vertical direction in parallel to the inner sheets 2A, 2B and, in a wearer's crotch region, are less bulky than in the case of the panels 5A, 5B extending in horizontal direction. Thus, it is not apprehended that these panels 5A, 5B might give the wearer a feeling of incompatibility.

**[0029]** Fig. 5 is a perspective view showing the trunk-type disposable pants 1 as a specific embodiment of this invention different from that of Fig. 1 as viewed from the front and Fig. 6 is an exploded perspective view showing the pants 1 of Fig. 5. Referring to Fig. 6, the inner sheets 2A, 2B are symmetrically opposed to each other with

respect to a plane and the outer sheets 3A, 3B are also symmetrically opposed to each other with respect to a plane outside the inner sheets 2A, 2B.

**[0030]** The pants 1 according to this alternative embodiment comprise a pair of inner sheets 2A, 2B, a pair of outer sheets 3A, 3B and a pair of mat-like liquid-absorbent panels 5A, 5B so as to define a waist-opening 6 at a top of the pants 1 and a pair of leg-openings 7 at a bottom of the pants 1. The waist-opening 6 is provided along its peripheral edge with a circumferentially extending film-like elastically stretchable member 8 bonded with tension thereto.

**[0031]** The inner sheets 2A, 2B is contoured by upper and lower ends 2a, 2b extending in parallel to each other transversely of the pants 1 and a front and rear side portions 2c, 2d extending in parallel to each other longitudinally of the pants 1. The inner sheet 2A, 2B is formed between the front and rear side portions 2c, 2d with a cutout 9 depressed from the upper end 2a toward the lower end 2b. The rear side edge 2d of the inner sheet 2A, 2B gets nearer, describing a circular arc, to a longitudinal center line Y1 as the rear side edge 2d extends from the upper end 2a toward the lower end 2b.

**[0032]** The inner sheets 2A, 2B are provided in the vicinity of their bottom sides 9b with elastically stretchable members 13 transversely extending above the respective panels 5A, 5B in a manner such that these members 13 are bonded with tension to the respective inner sheets 2A, 2B and covered with portions thereof.

**[0033]** The panel 5A, 5B is placed in a region surrounded by the front and rear side portions 2c, 2d, the lower end 2b and the bottom side 9b of the inner sheet 2A, 2B and bonded to a surface of the sheet 2A, 2B opposed to the panel 5A, 5B.

**[0034]** The outer sheet 3A, 3B is contoured by upper and lower ends 3a, 3b transversely extending in parallel to each other and front and rear side edges 3c, 3d longitudinally extending in parallel to each other. The rear side edge 3d of the outer sheet 3A, 3B gets nearer, describing a circular arc, to a longitudinal center line Y2 bisecting a dimension between the front side edge 3c and the rear side edge 3d as the rear side edge 3d extends from the upper end 3a toward the lower end 3b. Surface of the outer sheet 3A, 3B opposed to the inner sheet 2A, 2B is provided along its upper end 3a with a transversely extending elastic member 8 bonded thereto.

**[0035]** To assemble the components illustrated by Fig. 6 in the exploded perspective view and thereby to obtain the pants 1, the inner sheets 2A, 2B are placed upon each other with the respective center lines Y1 brought in line with each other and then the opposed surfaces thereof are continuously or intermittently bonded to each other along bond lines 11. These bond lines 11 extend in parallel to the cutouts 9, describing circular arcs, from the upper ends 2a toward the lower ends 2b of the sheets 2A, 2B, respectively. The portions of the bond lines 11 describing the circular arcs extend be-

tween the panels 5A, 5B and the lower ends 2b of the sheets 2A, 2B.

[0036] After the opposed surfaces of the inner sheets 2A, 2B have been bonded to each other, the respective fixed ends 4a of the side sheets 4A, 4B are partially folded back to respective inner surfaces of the side sheets 4A, 4B and these fixed ends 4a are bonded to respective outer surfaces of the sheets 2A, 2B in the vicinity of their respective bottom sides 9b. At the same time, the transversely opposite ends 4c also are bonded to the sheets 2A, 2B in the vicinity of their opposed sides 9a with the elastic members 10 being kept under tension.

[0037] The inner sheets 2A, 2B and the outer sheets 3A, 3B are placed upon one another, respectively, with the center lines Y1, Y2 of these inner and outer sheets 2A, 2B; 3A, 3B brought in line with one another, respectively. Then the inner and outer sheets 2A, 3A have their surfaces opposed to each other continuously or intermittently bonded to each other by means of bond lines 12 extending along the front and rear side portions 2c, 2d; 3c, 3d, respectively. Similarly, the inner and outer sheets 2B, 3B have their surfaces opposed to each other continuously or intermittently bonded to each other by means of bond lines 12 extending along the front and rear side portions 2c, 2d; 3c, 3d, respectively.

[0038] In the pants 1 according to this alternative embodiment, the front and rear side portions 2c, 2d of the sheets 2A, 2B have portions lying in the upper ends 2a and bonded to each other along bond lines 14. These portions bonded together provide a higher bonding strength as measured circumferentially of the pants 1 than the bonding strength which will be provided by these portions not bonded together. In this manner, there is no anxiety that the inner sheets 2A, 2B might be separated from each other as the pants 1 are put on the wearer's body and the waist-opening is circumferentially stretched.

[0039] Fig. 7 is a perspective view showing the pants of Fig. 5 as viewed in a section taken along line C - C in Fig. 5 and Fig. 8 is a sectional view taken along line D - D in Fig. 5. The inner sheets 2A, 2B are placed upon each other so that the respective pairs of opposed sides 9a face inwardly of the pants 1 in contact with each other. The front and rear side portions 2c, 2d of the respective inner sheets 2A, 2B face outwardly of the pants 1 in contact with the front and rear side edges 3c, 3d of the adjacent outer sheets 3A, 3B, respectively.

[0040] In the pants 1 assembled, the opposed surfaces of the inner sheets 2A, 2B extending from their bottom sides 9b to the respective bond lines 11 expand outward transversely of the pants 1 as elastic members 13 contract, resulting in formation of a pocket P opening upwardly of the pants 1.

[0041] The inner sheets 2A, 2B forming the pocket P serve as barriers of the pocket P. Excretion discharged into the pocket P is absorbed by the panels 5A, 5B lying within the pocket P. The barriers function to prevent excretion leak from occurring in the vicinity of a crotch re-

gion. The panels 5A, 5B extend substantially in vertical direction in parallel to the inner sheets 2A, 2B and, in a wearer's crotch region, are substantially less bulky than in the case of the panels 5A, 5B extending in horizontal direction. Thus, it is not apprehended that these panels 5A, 5B give the wearer a feeling of incompatibility.

[0042] The surfaces of the inner sheets 2A, 2B opposed to each other have their upper ends 2a not bonded to each other and therefore it is not apprehended that the regions of the sheets 2A, 2B extending in the vicinity of their upper ends 2a might give the wearer a feeling of stiffness even when these regions are pressed against the wearer's skin under a contractile force of the elastic members 8.

[0043] In these embodiments of the pants 1 illustrated by Figs. 1 and 5, respectively, the sheets 2A, 2B are bonded together leaving innermost edges of the opposed sides 9a free over an extent sufficient to alleviate a stiffness of the bonded regions even when these innermost edges come in contact with the wearer's crotch. In this way, stimulation possibly experienced by the wearer's skin can be effectively alleviated.

[0044] The surfaces of the inner sheet 2A and the adjacent outer sheet 3A as well as the surfaces of the inner sheet 2B and the adjacent outer sheet 3B are bonded to one another leaving outermost edges of their front and rear sides 2c, 3c, 2d, 3d free over an extent sufficient to alleviate a stiffness of the bonded regions even when these innermost edges come in contact with the wearer's arms. In this way, stimulation possibly experienced by the wearer's skin is effectively alleviated.

[0045] An alternative embodiment is also possible such that both the front side portions 2c, 3c and the rear side portions 2d, 3d of the inner and outer sheets 2A, 2B; 3A, 3B get near to the respective center lines Y1, Y2, describing circular arcs or describing straight lines as these front and rear side portions extend from their upper ends 2a, 3a to their lower ends 2b, 3b.

[0046] The inner sheets 2A, 2B and/or the outer sheets 3A, 3B may be formed with a nonwoven fabric of thermoplastic fiber. The side sheets 4A, 4B also may be formed with a nonwoven fabric of thermoplastic fiber. The nonwoven fabric made porous to improve its moisture-permeable property or the nonwoven fabric formed on its sheet surface with irregularities to improve its cushioning property also may be used for this purpose. Particularly the inner sheets 2A, 2B destined to come in direct contact with the wearer's crotch are preferably formed with the material offering high liquid-permeability, moisture-permeability and softness, for example, rayon or cotton fiber containing nonwoven fabric.

[0047] It is also possible to use composite nonwoven fabric (SMS nonwoven fabric) comprising high water-resistance melt blown nonwoven fabric having opposite sheet surfaces each laminated with sheet surface of spun bond nonwoven fabric having a high strength and a high flexibility. The SMS nonwoven fabric is obtained by sandwiching the melt blown nonwoven fabric be-

tween two layers of spun bond nonwoven fabric and then bonding these melt blown nonwoven fabric and spun bond nonwoven fabric together using a technique of press working. Use of the SMS nonwoven fabric advantageously results in the pants 1 having a high strength, a high water-resistance and a comfortable touch.

[0048] The outer sheets 3A, 3B may be also formed with a nonwoven fabric which is stretchable transversely thereof or both transversely and longitudinally thereof. In this case, the elastic members 8 associated with the waist-opening provided along the upper ends 3a of the sheets 3A, 3B may be eliminated.

[0049] The elastic members 8, 10, 13 may be formed with a synthetic rubber, a natural rubber, a stretchable film containing synthetic rubber, or a spun bond nonwoven fabric or a melt blown nonwoven fabric containing synthetic rubber as a principal ingredient. It is also possible to cover the elastic members 8, 10, 13 with nonwoven fabric and to bond the elastic members with tension to said nonwoven fabric.

[0050] It is also possible to attach the elastic members 8 associated with the waist-opening to the respective outer surfaces of the outer sheets 3A, 3B. In the pants 1 assembled, it is possible to cover the exposed regions of the elastic members 8 attached to the opposed surfaces of the sheets 3A, 3B with nonwoven fabric in order to prevent the elastic members 8 from coming in contact with the wearer's skin.

[0051] The liquid-absorbent panel 5A, 5B comprises a mixture of fluff pulp and high absorption polymer grains compressed to a desired thickness and entirely covered with a water-pervious sheet such as tissue paper (not shown). Bonding of the panels 5A, 5B, the elastic members 8, 10, 13 and the sheets 2A, 2B, 3A, 3B, 4A, 4B may be carried out using suitable adhesive such as hot melt adhesive, pressure-sensitive adhesive or a fusing technique such as heat-sealing or supersonic sealing.

## Claims

1. Trunks-type disposable pants having a waist-opening at its top and a pair of leg-openings at its bottom wherein said waist-opening is provided along its peripheral edge having an elastic stretchability circumferentially of said waist-opening.

said trunks-type disposable pants further comprising

said pants including a pair of inner sheets confronting each other and a pair of outer sheets lying outside respective said inner sheets, said inner sheets as well as said outer sheets being contoured by upper and lower ends transversely extending in parallel to each other, respectively, and front and rear side portions longitudinally extending in parallel to each other, respectively;

said inner sheets being formed between their front and rear side portions with cutouts depressed from said upper ends toward said lower ends and provided with mat-like liquid-absorbent panels attached to opposed surfaces of said inner sheets so that said opposed surfaces of said inner sheets are bonded together by means of bond lines extending in parallel to said cutouts and partially extending below said liquid-absorbent panels; and

opposed surfaces of said inner sheets and said outer sheets being bonded together along said front and rear side portions of these sheets.

2. The pants according to Claim 1, wherein the opposed surfaces of said inner sheets are bonded together along the upper ends of said inner sheets and along limited regions of said front and rear side portions lying in the vicinity of said upper ends of said inner sheets, at least along said limited regions of said front and rear side portions lying in the vicinity of said upper ends of said inner sheets.
3. The pants according to Claim 1, wherein elastically stretchable members are bonded with tension to said inner sheets along respective said bottom sides of said cutouts so as to extend above respective said liquid-absorbent panels transversely of said inner sheets.
4. The pants according to Claim 1, wherein liquid-resistant side sheets are bonded to said inner sheets along respective said bottom sides of said cutouts so as to extend above respective said liquid-absorbent panels transversely of said inner sheets, said side sheets being made of nonwoven fabric and having fixed ends transversely extending and fixed to said inner sheets, free ends extending above said fixed ends across said cutouts and transversely opposite fixed sides fixed to said inner sheets along said cutouts so as to extend longitudinally of said side sheets, said free ends being provided with elastically stretchable members bonded with tension thereto so as to extend transversely of said side sheets.
5. The pants according to claim 1, wherein said inner sheets and/or said outer sheets are made of nonwoven fabric.

FIG. 1

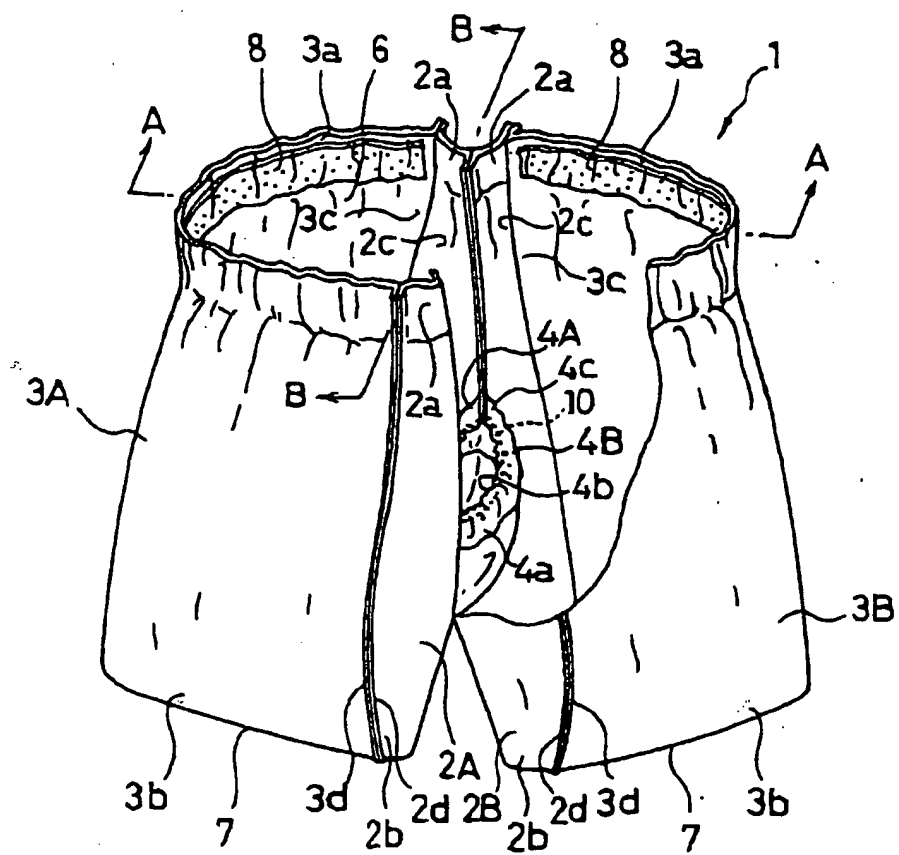
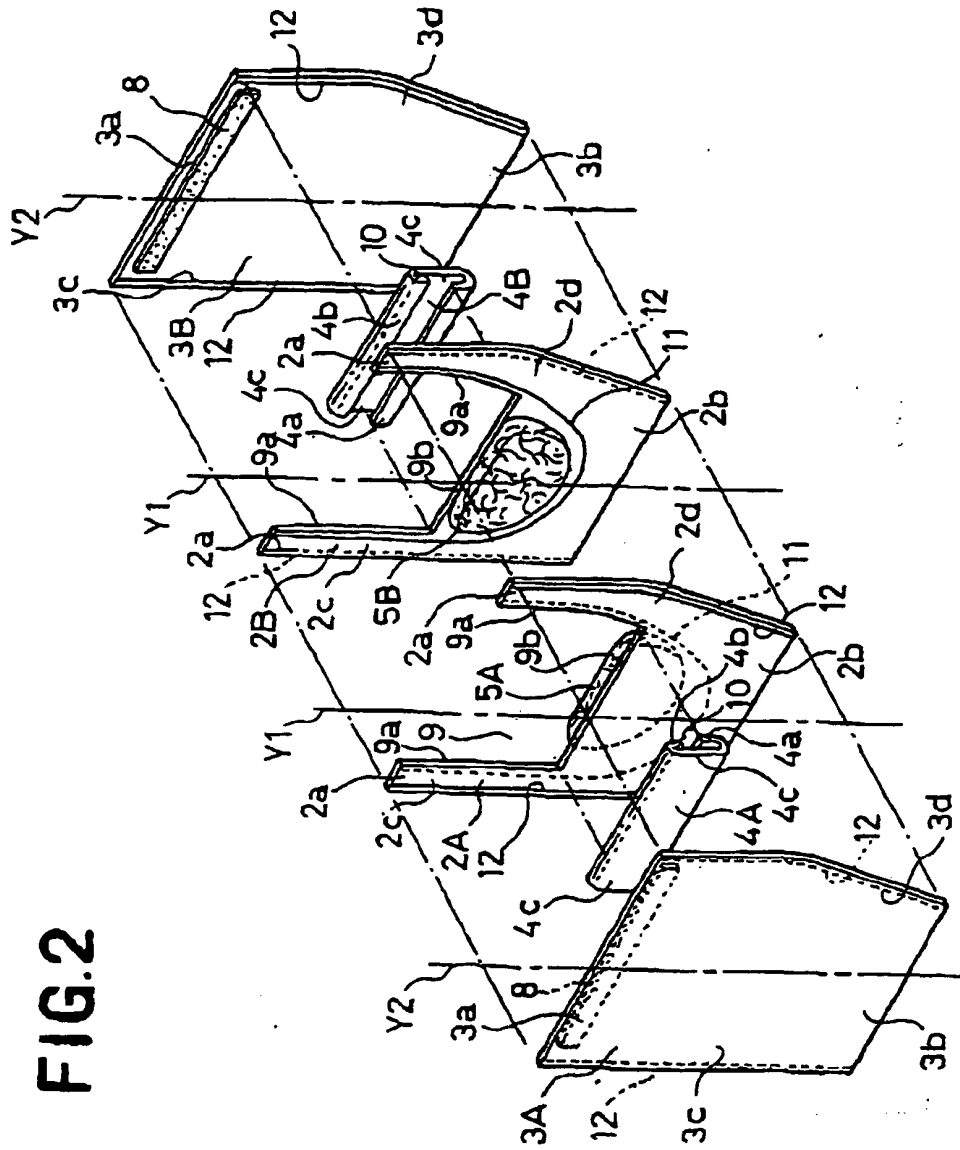
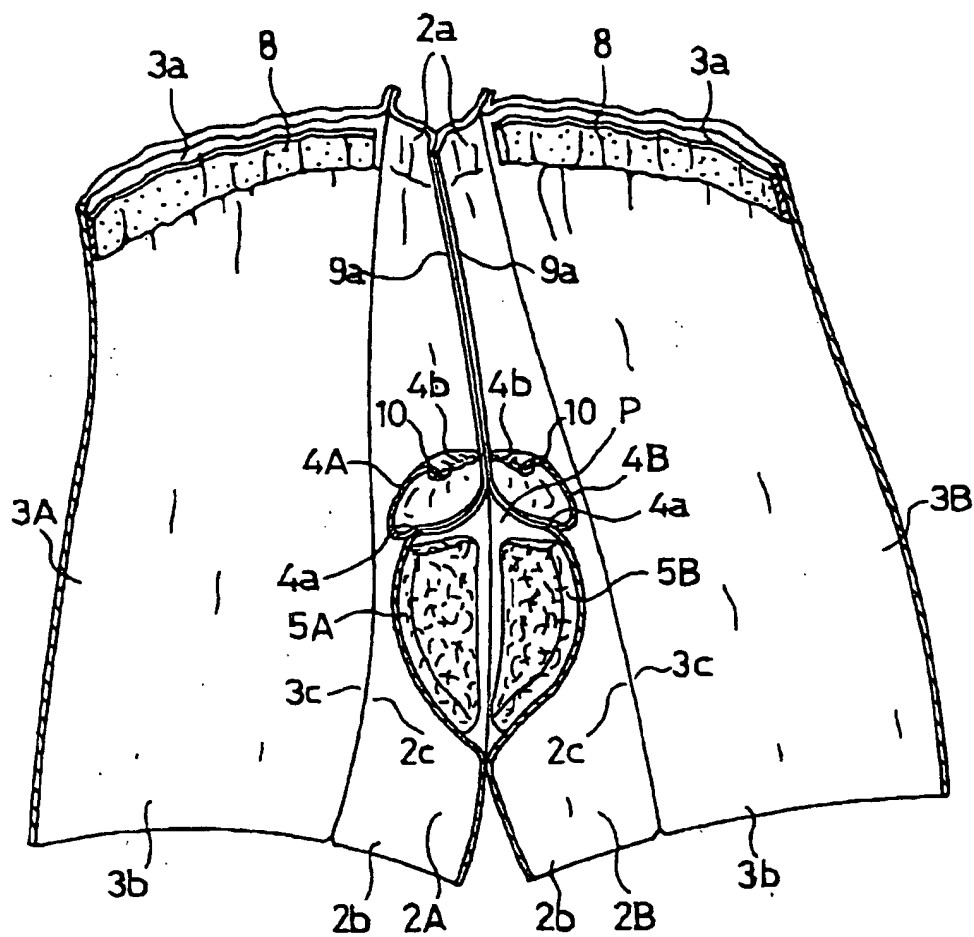


FIG.2





**FIG.3**



**FIG. 4**

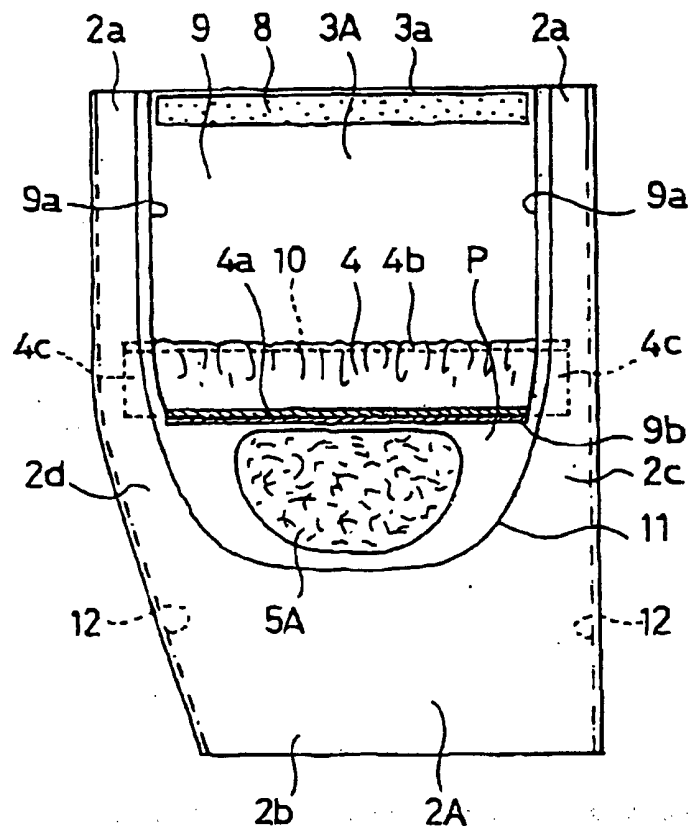


FIG. 5

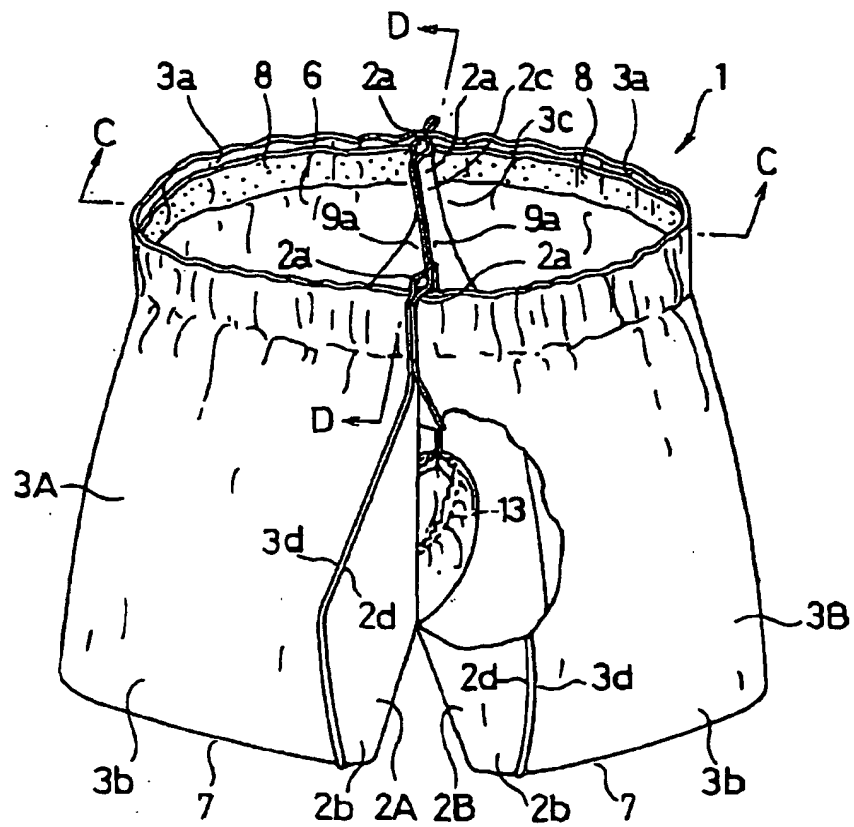


FIG. 6


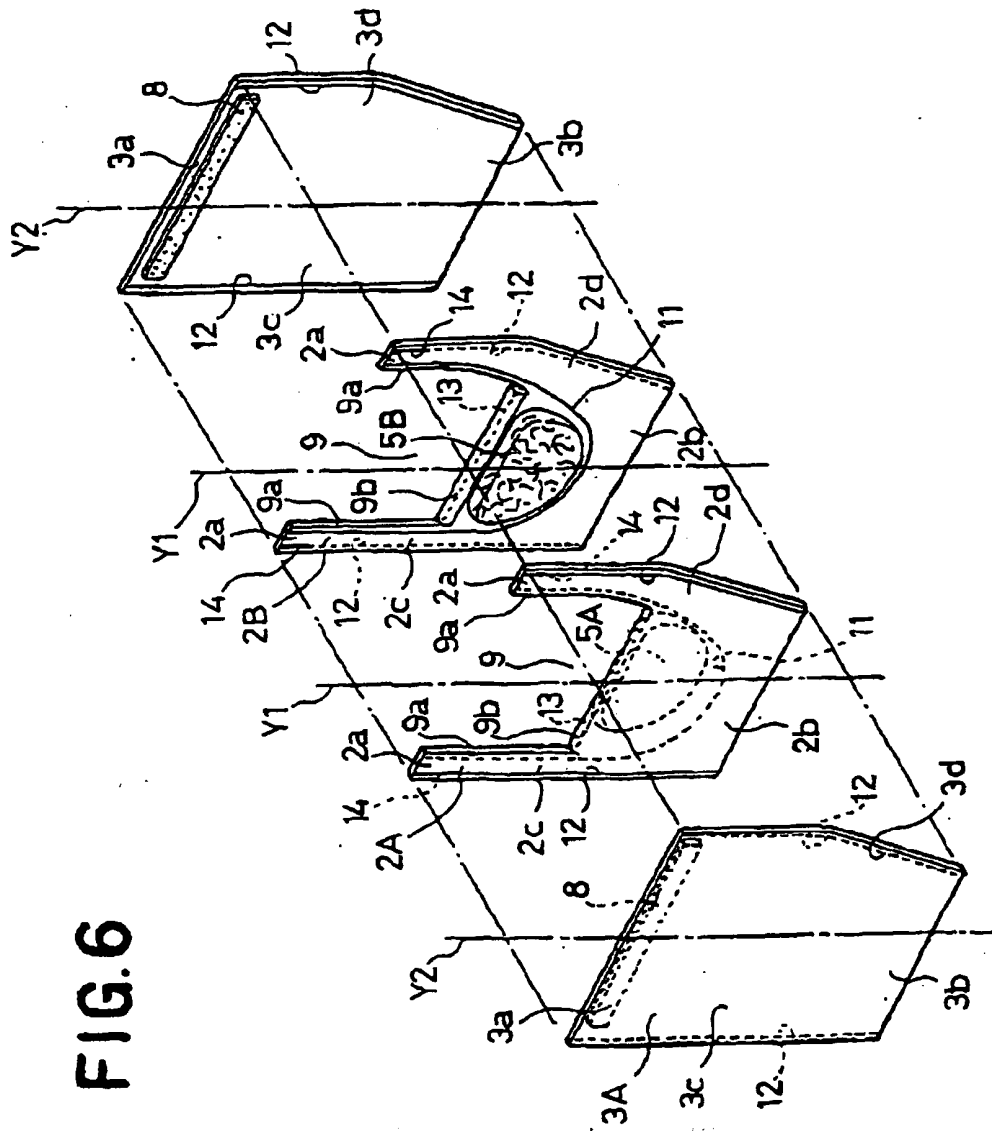


FIG. 7







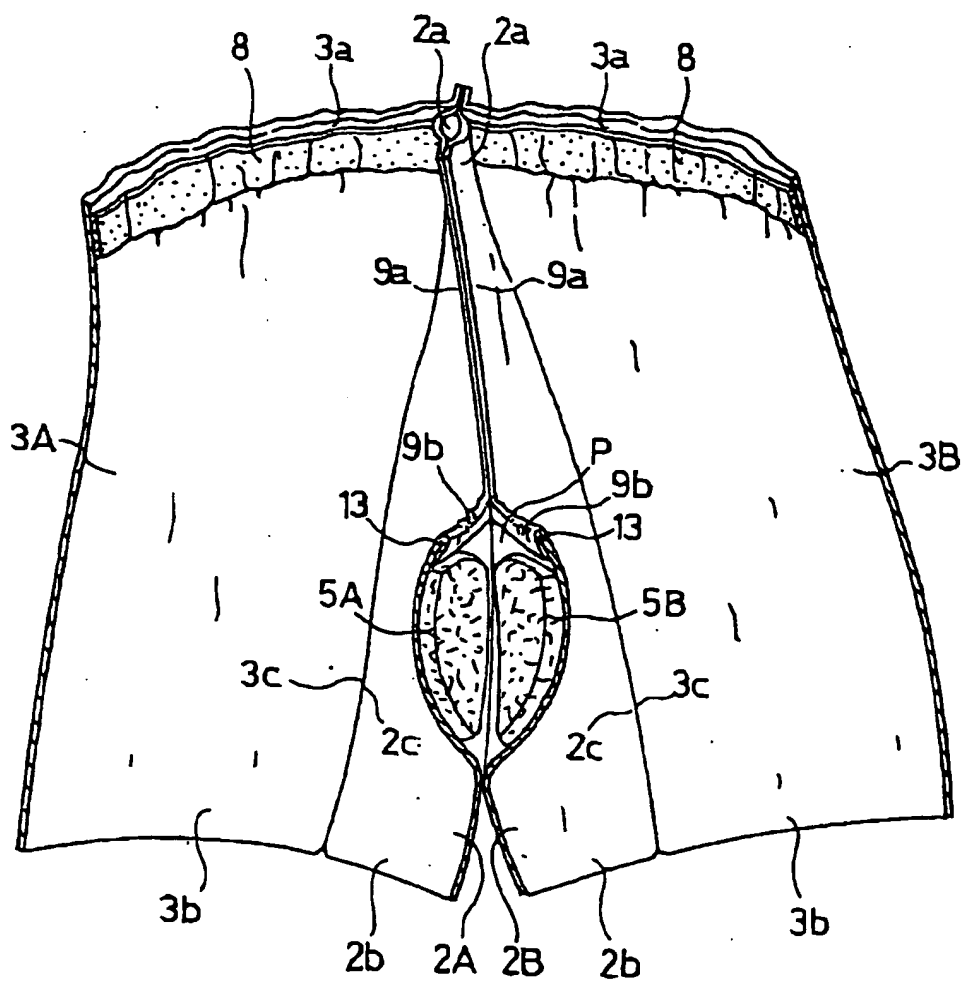

European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number

EP 01 30 1411

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	US 6 010 586 A (SUPRISE JODY DOROTHY) 4 January 2000 (2000-01-04) * abstract * * column 5, line 59 - column 6, line 20; figures *	1,3,5	A61F13/496
A	EP 0 933 072 A (UNI CHARM CORP) 4 August 1999 (1999-08-04) * figures *	1,5	
A	US 5 601 544 A (GLAUG FRANK S ET AL) 11 February 1997 (1997-02-11) * abstract; figures *	1,3-5	
A	US 5 915 536 A (FRIES DONALD MERLIN ET AL) 29 June 1999 (1999-06-29) * figures *	1	
A	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 20, 10 July 2001 (2001-07-10) & JP 2001 079039 A (TEIKOKU), 27 March 2001 (2001-03-27) * abstract; figures *	1	
P,A	WO 00 33680 A (MYOGA AKIRA ;ISHIKAWA HITOMI (JP); MURAKAMI MASAKI (JP); UNI CHARM) 15 June 2000 (2000-06-15) * abstract; figures *	1-5	
P,A	WO 00 33679 A (MURAKAMI MASAKI ;UNI CHARM CORP (JP); MATSUSHITA MICHIO (JP)) 15 June 2000 (2000-06-15) * abstract; figures *	1-5	
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
THE HAGUE		3 October 2001	Seabra, L
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 02 (POC01)



**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 30 1411

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

03-10-2001

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6010586	A	04-01-2000	US 5853405 A	29-12-1998
			AU 7521396 A	11-06-1997
			CA 2235700 A1	29-05-1997
			WO 9718785 A1	29-05-1997
			ZA 9609570 A	17-06-1997
EP 0933072	A	04-08-1999	JP 11206808 A	03-08-1999
			AU 1422999 A	19-08-1999
			BR 9900375 A	28-12-1999
			CN 1225812 A	18-08-1999
			EP 0933072 A2	04-08-1999
			TW 392502 Y	01-06-2000
US 5601544	A	11-02-1997	CA 2121512 A1	23-06-1995
US 5915536	A	29-06-1999	AU 6885998 A	30-10-1998
			EP 0973472 A1	26-01-2000
			TR 9902493 T2	22-01-2001
			WO 9844883 A1	15-10-1998
JP 2001079039	A	27-03-2001	NONE	
WO 0033680	A	15-06-2000	JP 2000170003 A	20-06-2000
			AU 1682500 A	26-06-2000
			CN 1292650 T	25-04-2001
			EP 1092355 A1	18-04-2001
			WO 0033680 A1	15-06-2000
			TW 428436 Y	01-04-2001
			US 6289519 B1	18-09-2001
WO 0033679	A	15-06-2000	JP 2000170002 A	20-06-2000
			AU 1681700 A	26-06-2000
			CN 1290132 T	04-04-2001
			EP 1108371 A1	20-06-2001
			WO 0033679 A1	15-06-2000

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**THIS PAGE BLANK (USPTO)**